



UNI-ROYAL
厚聲集團

DATA SHEET

Product Name Radial Terminal Type-PRZ Series Resistors

Part Name PRZ Series

File No. DIP-SP-042

Uniroyal Electronics Global Co., Ltd.

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email marketing@uni-royal.cn

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

1. Scope

- 1.1 This datasheet is the characteristics of Radial Terminal Type-PRZ Series manufactured by UNI-ROYAL.
- 1.2 Self-extinguishing
- 1.3 Extremely small & moisture resistance
- 1.4 Too low or too high values on Wire-wound & power-film type can be supplied on a case to case basis

2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

- 2.1 For Cement Fixed Resistors, these 4 digits are to indicate the product type but if the product type has only 3 digits, the 4th digit will be “0”

Example: PZ1A=PRZA-1 type PZ2A=PRZA-2 type PRZC=PRZC type

PZ1C=PRZC-1 type PRZD=PRZD type

- 2.2 5th~6th digits:

- 2.2.1 For power of 1 watt to 16 watt, the 5th digit will be a number or a letter code and the 6th digit will be the letters of W.

Example: 3W=3W 5W=5W 7W=7W AW=10W FW=15W

- 2.2.2 For power rating between 20 watt to 99 watt, the 5th and the 6th digits will show the whole numbers of the power rating itself.

Example: 20=20W

- 2.3 The 7th digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

J=±5% K=±10%

- 2.4 The 8th to 11th digits is to denote the Resistance Value.

- 2.4.1 For Cement Fixed Resistors the 8th digits will be coded with “W” or “P” to denote Wire-wound type or Power Film type respectively of the Cement Fixed Resistor product. The 9th to 11th please refer to point a) of item 4.

Example: W12J=1.2Ω W120=12Ω P273=27KΩ

- 2.5 The 12th, 13th & 14th digits.

- 2.5.1 The 12th digit is to denote the Packaging Type with the following codes:

B=Bulk/Box


- 2.5.2 The 13th digit is normally to indicate the Packing Quantity, This digit should be filled with “0” for the Cement products with “Bulk/Box” packing requirements.

- 2.5.3 For some items, the 14th digit alone can use to denote special features of additional information with the following codes or standard product

Example: 0= standard product


3. Ordering Procedure

(Example: PRZC 15W ±5% 10Ω B/B)

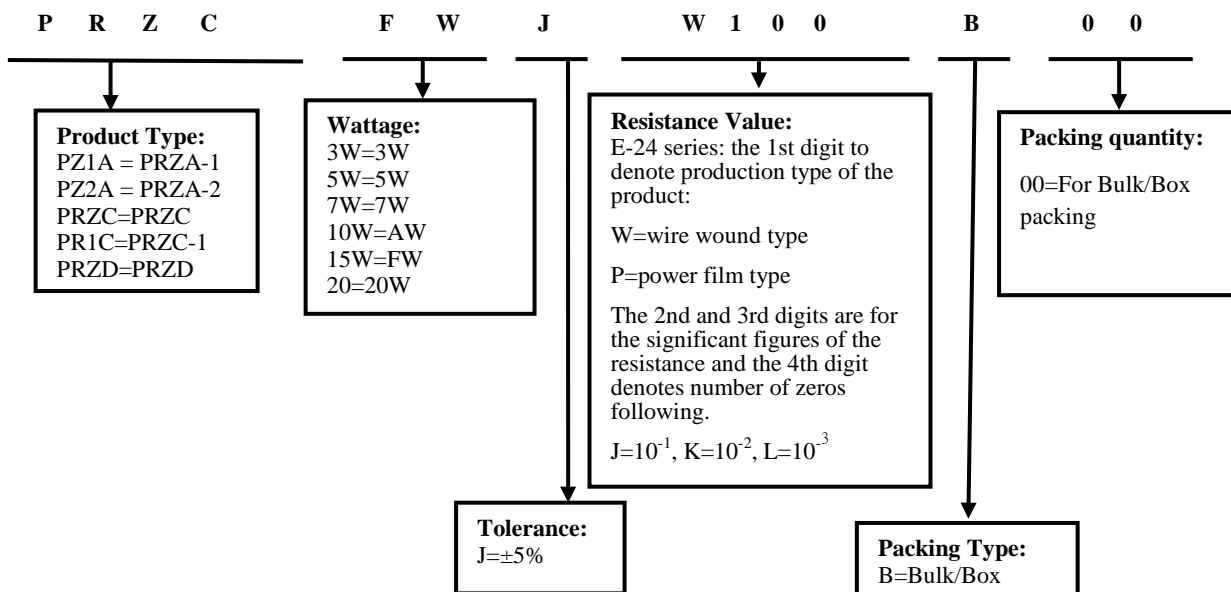

4. Marking

Example:

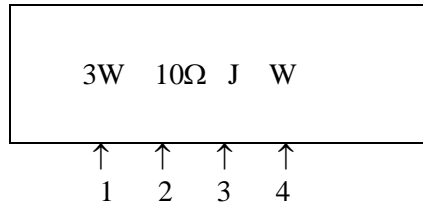

Code description and regulation:


1. Wattage Rating
2. Nominal Resistance Value
3. Resistance Tolerance. J: $\pm 5\%$
 K: $\pm 10\%$

4. Pattern:

M: Power film W: Wire wound

Color of marking: Black Ink

5. Ratings & Dimension

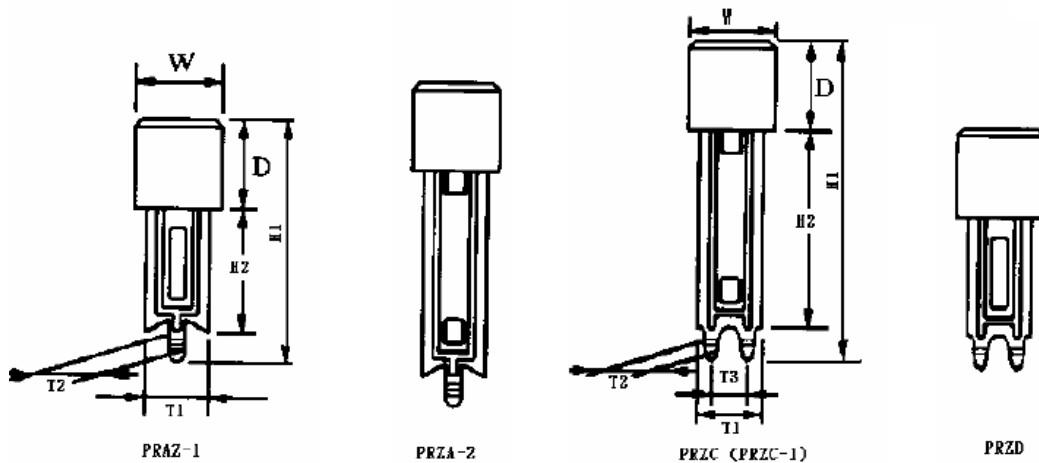

5.1 PRZA-1Types:

Type	Dimension(mm)								Resistance Range	
	W ± 1	D ± 1	L	P ± 1.5	T1 ± 1	T2 ± 0.2	+2 -1 H1	+2 -1 H2	Wire Wound	Power Film
3W	10	9	22 ± 1	9.5	7	1.6	24	10	0.1 Ω ~47 Ω	48 Ω ~150K Ω
5W	10	9	25/27 ± 1	9.5/15	7	1.6	24	10	0.1 Ω ~120 Ω	121 Ω ~200K Ω
7W	10	9	35 ± 1	22	7	1.6	24	10	0.1 Ω ~560 Ω	561 Ω ~200K Ω
10W	10	9	48 ± 1.5	32/35	7	1.6	24	10	1 Ω ~820 Ω	821 Ω ~200K Ω
15W	12.5	11.5	48 ± 1.5	32	10	3	35	15	1 Ω ~1K Ω	1.1K Ω ~200K Ω
20W	12.5	13.5	63 ± 1.5	42	10	3	35	15	2 Ω ~1.2K Ω	1.3K Ω ~200K Ω

5.2 PRZA-2 Types:

Type	Dimension(mm)								Resistance Range	
	W±1	D±1	L	P±1.5	T1±1	T2±0.2	+2 H1 -1	+2 H2 -1	Wire Wound	Power Film
3W	10	9	22±1	9.5	7	1.6	39	25	0.1Ω~47Ω	48Ω~150KΩ
5W	10	9	27±1	15	7	1.6	39	25	0.1Ω~120Ω	121Ω~200KΩ
7W	10	9	35±1	22	7	1.6	39	25	0.1Ω~560Ω	561Ω~200KΩ
10W	10	9	48±1.5	32/35	7	1.6	39	25	1Ω~820Ω	821Ω~200KΩ
15W	12.5	11.5	48±1.5	32	10	3	47	30	1Ω~1KΩ	1.1KΩ~200KΩ
20W	12.5	13.5	63±1.5	42	10	3	47	30	2Ω~1.2KΩ	1.3KΩ~200KΩ

5.3 PRZC Types:

Type	Dimension(mm)								Resistance Range		
	W±1	D±1	L	P±1.5	T1±1	T2±0.2	T3±0.5	+2 H1 -1	+2 H2 -1	Wire Wound	Power Film
3W	10	9	22±1	9.5	7	1.5	3.5	36	22	0.1Ω~47Ω	48Ω~150KΩ
5W	10	9	27±1	15	7	1.5	3.5	36	22	0.1Ω~120Ω	121Ω~200KΩ
7W	10	9	35±1	22	7	1.5	3.5	36	22	0.1Ω~560Ω	561Ω~200KΩ
10W	10	9	48±1.5	32/35	7	1.5	3.5	36	22	1Ω~820Ω	821Ω~200KΩ
15W	12.5	11.5	48±1.5	32	10	2	5	47	30	1Ω~1KΩ	1.1KΩ~200KΩ
20W	12.5	13.5	63±1.5	42	10	2	5	47	30	2Ω~1.2KΩ	1.3KΩ~200KΩ


5.4 PRZC-1 Type

Type	Dimension(mm)								Resistance Range		
	W±1	D±1	L	P±1.5	T1±1	T2±0.2	T3±0.5	+2 H1 -1	+2 H2 -1	Wire Wound	Power Film
5W	10	9	27±1	15	7	1.3	3.5	39	24	0.1Ω~120Ω	121Ω~200KΩ
7W	10	9	35±1	22	7	1.3	3.5	39	24	0.1Ω~560Ω	561Ω~200KΩ

5.5 PRZD Type

Type	Dimension(mm)								Resistance Range		
	W±1	D±1	L	P±1.5	T1±1	T2±0.2	T3±0.5	+2 H1 -1	+2 H2 -1	Wire Wound	Power Film
3W	10	9	22±1	9.5	7	1.3	3.5	24	10	0.1Ω~47Ω	48Ω~150KΩ
5W	10	9	27±1	15	7	1.3	3.5	24	10	0.1Ω~120Ω	121Ω~200KΩ
7W	10	9	35±1	22	7	1.3	3.5	24	10	0.1Ω~560Ω	561Ω~200KΩ
10W	10	9	48±1.5	32/35	7	1.3	3.5	24	10	1Ω~820Ω	821Ω~200KΩ

6. Derating Curve

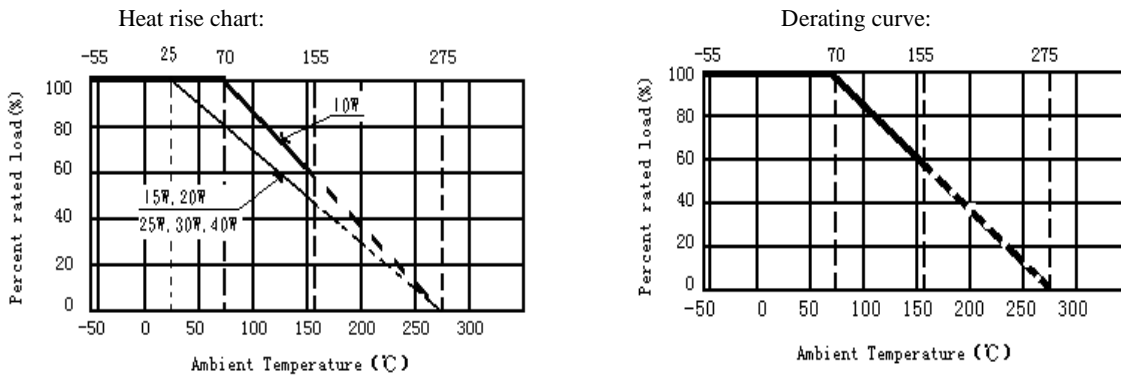

6.1 Voltage rating:


Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$

Where: RCWV = rated dc or RMS ac continuous working voltage at commercial-line frequency and waveform (VOLT.)

P = power rating (WATT.) R= nominal resistance (OHM)

7. Structure

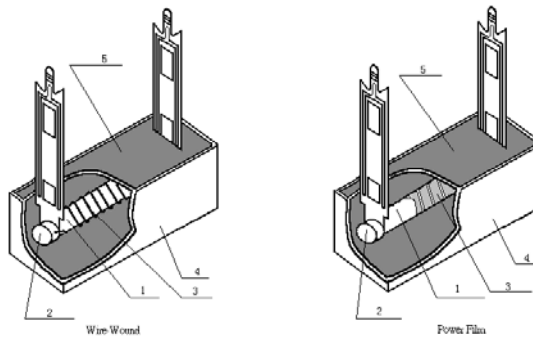

No.	Name	Material Generic Name
1	Body	Al ₂ O ₃
2	Cap	Tin plated iron
3	Resistor element	Power: Metal Oxide Film
		Wire wound: Alloy Wire
4	Ceramic case	Al ₂ O ₃ Cao
5	Filling materials	SiO ₂

8. Performance Specification

Characteristic	Limits	Test Methods (GB/T5729&JIS-C-5201&IEC60115-1)
Temperature Coefficient	$\geq 20\Omega$: $\pm 350\text{PPM}/^\circ\text{C}$ Max.. $< 20\Omega$: $\pm 400\text{PPM}/^\circ\text{C}$ Max..	4.8 Natural resistance changes per temp. Degree centigrade $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM}/^\circ\text{C)}$ R ₁ : Resistance Value at room temperature (t ₁) ; R ₂ : Resistance at test temperature (t ₂) t ₁ : +25°C or specified room temperature t ₂ : Test temperature (-55°C or 125°C)
Short-time overload	Resistance change rate must be in $\pm(5\%+0.05\Omega)$,and no mechanical damage.	4.13 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.
Resistance to soldering heat	Resistance change rate must be in $\pm(1\%+0.05\Omega)$,and no mechanical damage.	4.18 Permanent resistance change when leads immersed to a point 2.0-2.5mm from the body in 260°C $\pm 5^\circ\text{C}$ solder for 10 ± 1 seconds.
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down.	4.7 Resistors shall be clamped in the trough of a 90°metallic V-block and shall be tested at AC potential respectively specified in the above list for 60-70 seconds.for cement fixed resistors the testing voltage is 1000V.
Terminal strength	No evidence of mechanical damage	4.16 Direct load: Resistance to a 2.5 kg direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads. Twist test: Terminal leads shall be bent through 90°at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.
Solderability	95% coverage Min.	4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Test temp. Of solder:245°C $\pm 3^\circ\text{C}$ Dwell time in solder: 2~3seconds.
Humidity (Steady state)	Resistance change rate must be in $\pm(5\%+0.05\Omega)$,and no mechanical damage.	4.24 Temporary resistance change after 240 hours exposure in a humidity test chamber controlled at 40 $\pm 2^\circ\text{C}$ and 90~95%RH relative humidity
Load life in humidity	For Wire-wound: $\Delta R/R$: $\pm 5\%$ For Power film range: $< 100\text{K}\Omega$ $\Delta R/R$: $\pm 5\%$ $\geq 100\text{K}\Omega$ $\Delta R/R$: $\pm 10\%$	7.9 Resistance change after 1,000 hours (1.5 hours "ON", 0.5 hour "OFF") at RCWV in a humidity test chamber controlled at 40°C $\pm 2^\circ\text{C}$ and 90 to 95% relative humidity.
Load life	For Wire-wound: $\Delta R/R$: $\pm 5\%$ For Power film range: $< 100\text{K}\Omega$ $\Delta R/R$: $\pm 5\%$ $\geq 100\text{K}\Omega$ $\Delta R/R$: $\pm 10\%$	4.25.1 permanent resistance change after 1,000 hours operating at RCWV with duty cycle of 1.5 hours "ON", 0.5 hour "OFF" at 70°C $\pm 2^\circ\text{C}$ ambient.
Low Temperature Storage	For Wire-wound: $\Delta R/R$: $\pm 5\%$ For Power film range: $< 100\text{K}\Omega$ $\Delta R/R$: $\pm 5\%$ $\geq 100\text{K}\Omega$ $\Delta R/R$: $\pm 10\%$	IEC 60068-2-1 (Aa) Lower limit temperature , for 2H.

High Temperature Exposure	For Wire-wound: $\Delta R/R: \pm 5\%$ For Power film range: $< 100K\Omega \Delta R/R: \pm 5\%$ $\geq 100K\Omega \Delta R/R: \pm 10\%$	MIL-STD-202 108A Upper limit temperature \cdot for 16H.
---------------------------	------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------

9. Note

9.1 UNI-ROYAL recommend the storage condition temperature: 15°C~35°C, humidity :25%~75%.

(Put condition for individual product)

Even under UNI-ROYAL recommended storage condition, solderability of products over 1 year old.

(Put condition for each product) many be degraded.

9.2 Store / transport cartons in the correct direction, which is indicated on a carton as a symbol.

Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.

9.3 Product performance and soldered connections may deteriorate if the products are stored in the following places:

- a. Storage in high Electrostatic.
- b. Storage in direct sunshine \cdot rain and snow or condensation.
- c. Where the products are exposed to sea winds or corrosive gases, including Cl_2 , H_2S_3 , NH_3 , SO_2 , NO_2 .

10. Record

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~7	Mar.20, 2018	Haiyan Chen	Nana Chen
2	Modify characteristic	4~5	Feb.26, 2019	Haiyan Chen	Yuhua Xu
3	Modify characteristic	6	Nov.20,2020	Song Nie	Yuhua Xu
4	Modify the temperature coefficient test conditions	6	Nov.07, 2022	Haiyan Chen	Yuhua Xu

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice